

PALMARY PRODUCTS

- Centerless Grinder
- Cylindrical Grinder
- Internal Grinder
- Vertical Grinder
- Surface Grinder
- Special Purpose Grinder

PALMARY

CNC CENTERLESS GRINDER

PALMARY

PALMARY MACHINERY CO., LTD.

No. 77, Gongye Rd., Dali Dist., Taichung City 41280, Taiwan.

Tel: +886-4-2492-9799 Fax: +886-4-2492-9499

E-mail: palmmary@grinding.com.tw www.palmmary.com



PALMARY MACHINERY CO., LTD.



PALMARY Committed to Excellence

“ PALMARY CNC
Centerless Grinder
Innovative Design Concepts
Internationally Recognized
Performance

With a highly experienced design and manufacturing background in centerless grinders, PALMARY presents a new series of CNC centerless grinder. It is designed and engineered to offer the operational performance you've come to expect. Equipped with an advanced CNC control, featuring operator-friendly operation with maximum control convenience. When you require a machine that will greatly upgrade production efficiency and create more profits, PALMARY's new CNC centerless grinder will fully meet your requirements. ”

PALMARY Sets a New Performance Standard



FCL-18-4

- 1 axis servo drive
- CNC control
- Grinding range (standard) $\varnothing 1 \sim \varnothing 60$ mm
- Grinding wheel sizes $\varnothing 155 \times 205 \times \varnothing 228.6$ mm



FCL-12-1

- One axis servo drive
- CNC control
- Grinding range (standard) $\varnothing 1 \sim \varnothing 10$ mm
- Grinding wheel sizes $\varnothing 305 \times 150 \times \varnothing 120$ mm



FCL-1812-3

- 3 axes servo drive
- CNC control
- Grinding range (standard) $\varnothing 1 \sim \varnothing 60$ mm
- Grinding wheel sizes $\varnothing 455 \times 305 \times \varnothing 228.6$ mm



FCL-1810-1

- One axis servo drive
- CNC control
- Grinding range (standard) $\varnothing 1 \sim \varnothing 60$ mm
- Grinding wheel sizes $\varnothing 455 \times 255 \times \varnothing 228.6$ mm

**Optimal Machine Structure Design.
Maximum Rigidity and Stability.**

High Precision. Deformation-free for Life.

“ To ensure that each CNC centerless grinder from PALMARY maintains the best possible precision and stability, PALMARY R&D staff employ the most advanced structural design concepts. They conduct a deep structure analysis for the stress/strain conditions. Outstanding structure reinforcement design is combined with thorough stress relief to ensure that PALMARY's centerless grinders always present the perfect machining condition even after years of operation. ”



Stable Grinding Wheel Auto-Dressing Unit (For I Axis above)
The lower slideways of the grinding wheel dressing unit is of a concave dovetail structure. This combines with extra large slideways for greatly upgrading the stability of the grinding wheel unit.




Lubrication Oil Recycle
Lubrication oil for all slideways flow return through brass tubes to oil collecting tanks. This not only helps to maintain a clean working area, but also meets ISO-14000 environmental protection requirements.



Dresser for Regulating wheel & Grinding Wheel (For I Axis)


- Dresser structure is manufactured from alloy cast iron and is heat treated for wear resistance.
- Hydraulically operated dressing motion.
- Variable dressing speed.
- Dresser stand for regulating wheel can be adjusted to suit workpiece requirements, assuring high cylindrical accuracy.

“ The CNC centerless grinder from PALMARY fully presents high accuracy, high efficiency and user-friendly operational performance. ”

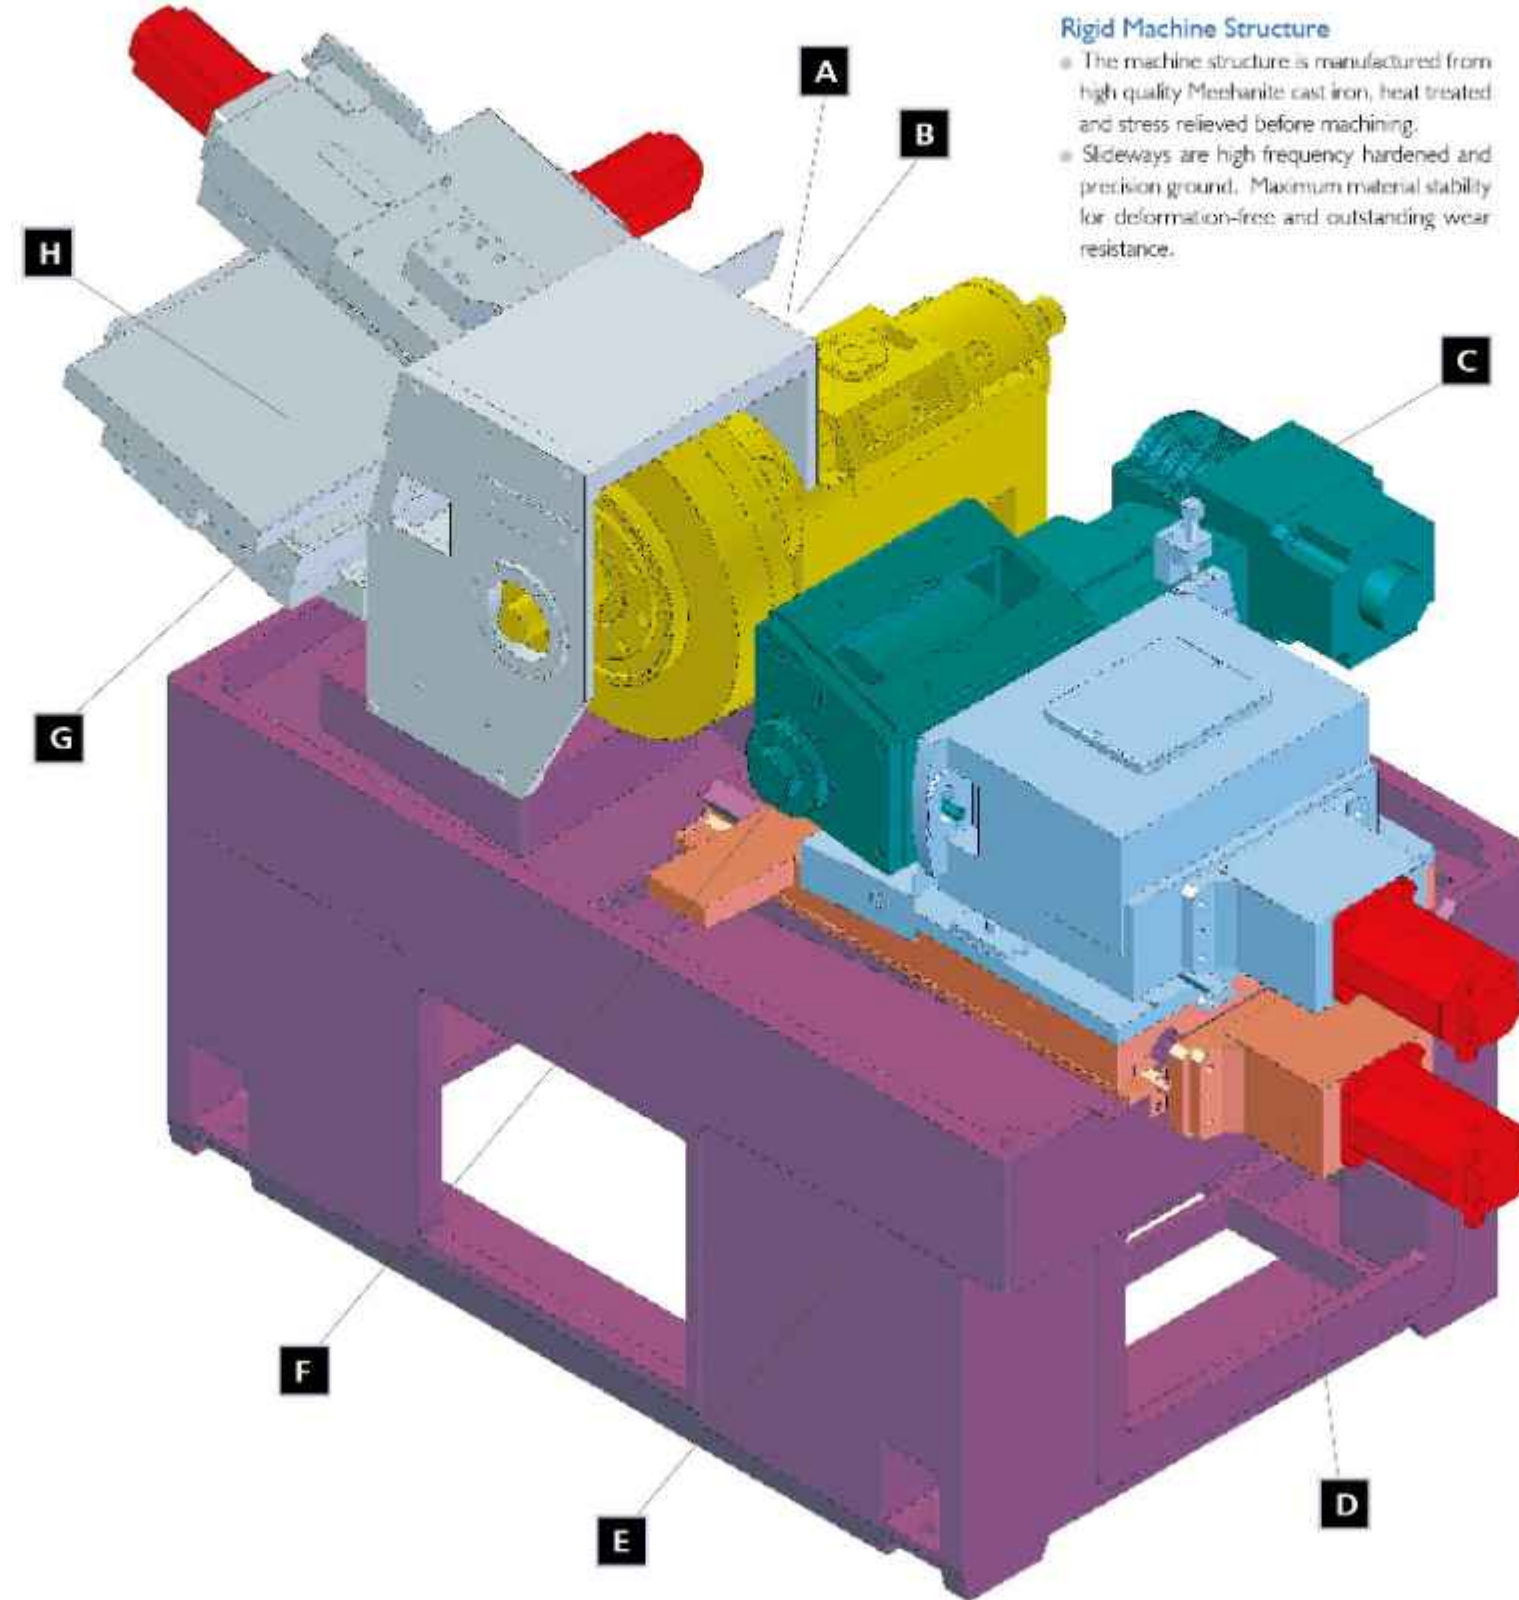


Rigid Machine Structure

- The machine structure is manufactured from high quality Meehanite cast iron, heat treated and stress relieved before machining.
- Slideways are high frequency hardened and precision ground. Maximum material stability for deformation-free and outstanding wear resistance.

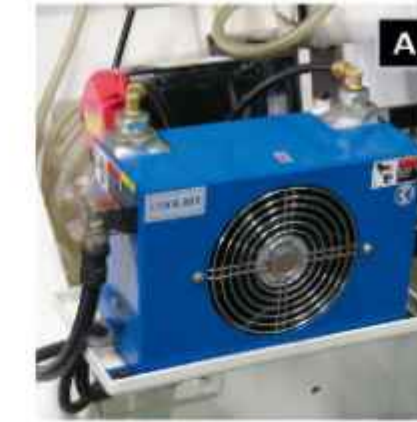

Hydraulic Cooling Device

- The lubrication system for bearings on grinding wheel spindle, regulating wheel spindle and hydraulic system are driven by the same hydraulic pump. A cooling fan is equipped for effectively reducing oil temperature.

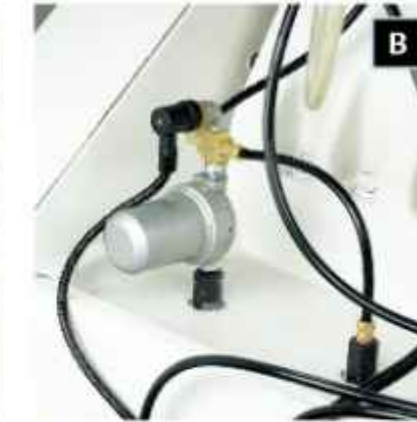

Pressure Switch

- When starting the grinding wheel and regulating wheel spindle, this pressure switch allows starting only when oil enters into bearings thereby providing safety protection for the spindle bearings.



Regulating wheel is driven by AC servo motor.

Precision Slideways Smooth Feed



Slide Table

- Upper slide swiveling is easy and accurate to adjust for making the machine suitable for infeed grinding. Also, it allows grinding for a varied diameter of workpieces. The Upper slide with +5° ~ -5° swiveling allows taper grinding by using infeed grinding mode.
- With thrufeed grinding, the upper slide provides a surface contact adjustment between the workpiece and grinding wheel. Swiveling adjustment range is +5° ~ -3°.
- Dovetailed slideway on the upper slide features smooth and accurate feeding and is lubricated by a centralized lubricator.
- Lower slide moves on "Λ" shaped and double-wedged ways. The slideways are hardened and precision ground. They feature smooth movement and properly protected to prevent dust from entering. Micro feed adjustment unit is 0.001 mm to meet high accuracy requirements for all workpieces.
- The slideways on the slide unit are coated with Turcite-B for superior wear resistance and smooth movement.



Lubrication System

- The automatic lubricator provides lubrication to the grinding wheel spindle.
- All slideways are lubricated by a centralized lubrication system, ensuring proper lubrication and feeding accuracy.

PALMARY CNC Centerless Grinder

State-of-the-Art Manufacturing Technique Quality Guaranteed

“Insisting on quality is a tradition at PALMARY. Each part is subject to rigorous quality control before entering the machine assembly line. Our highly skilled assembly technicians pay special care to every detail during assembly. A good deal of time is spent on dynamic operation tests, conducted before each machine leaves our factory. This is done to ensure that each PALMARY machine offers the perfect operational performance.”



Control Circuit Meets European Standards

- The control circuit consists of high quality electronic components, featuring dependable control performance and long service life.
- The electric cabinet is equipped with a heat exchanger, providing a constant temperature for the control circuit and maximum stability of control performance.
- The electric cabinet is dust-proof.


- Latest digital servo technology
- Easy to operate
- Excellent for efficient grinding applications
- Convenient editing
- Complete software package

CNC Control (ALL SLIDES CONTROLLED BY CNC)

- Z Axis : Grinding wheel auto. dressing (vertical) , FCL-12/18 0.75 kw
- Y Axis : Grinding wheel auto. dressing (horizontal) , FCL-12/18 0.75 kw
- A Axis : Regulating wheel auto. dressing (vertical) , FCL-12/18 0.75 kw
- B Axis : Regulating wheel auto. dressing (horizontal) , FCL-12/18 0.75 kw
- C Axis : Regulating wheel upper slide auto. infeed , FCL-12/18 1.2 kw
- X Axis : Regulating wheel lower slide auto. infeed , FCL-12 1.2 kw , FCL-18 1.8 kw



Axial Combination:

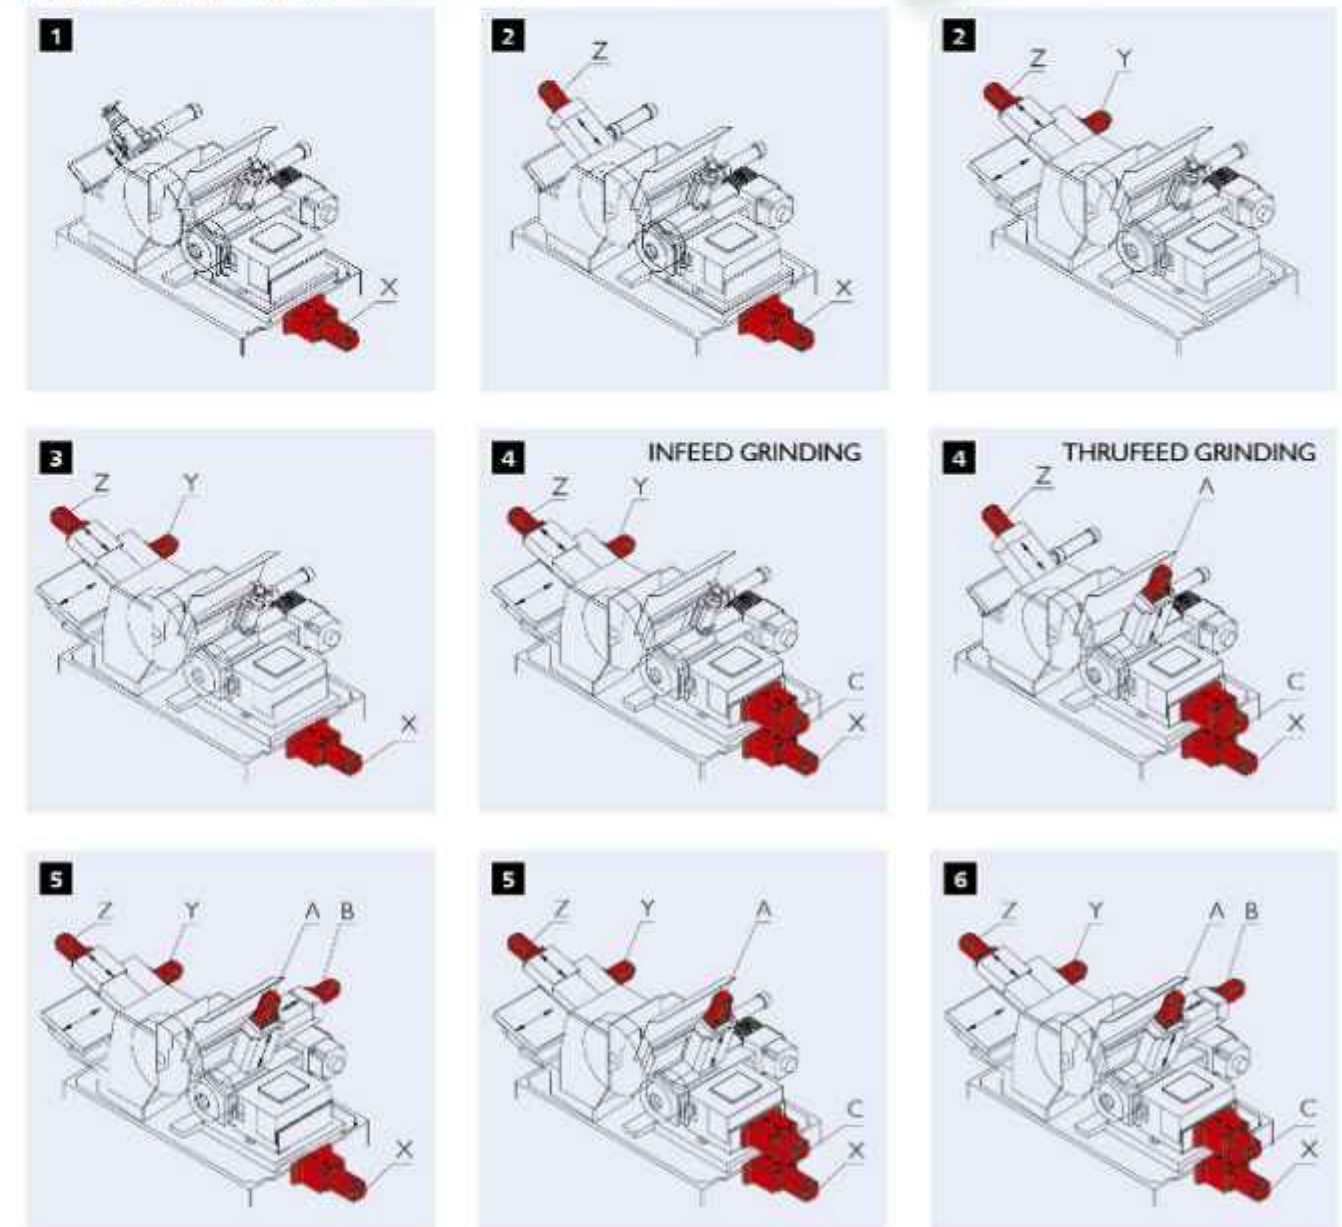



Precision Spindles

The grinding wheel spindle and the regulating wheel spindle are precision machined from Nickel Chromolybdenum alloy steel (SNCM 220). Also, they are subject to various treatments such as: normalized, tempered and carburized hardening. Then, the spindles are thru sub zero treated - under zero degrees, precision ground and precision machined.

- The inside of spindle is tempered to hardness HRC 25^o-30^o, while surface hardness reaches over HRC 62. The precision ground spindle is excellent for heavy-duty machining and features powerful torque, long service life, deformation free and maximum wear resistance.

PALMARY Centerless Grinder Designed for Upgrading your Competitive Edge

“The PALMARY Centerless grinder employs advanced CNC control, providing powerful functions and is easy operate. Precision construction throughout guarantees high parts accuracy. It's a machine that will boost your production efficiency and competitive edge.”



Automatic Unloading Equipment for Thrufeed Grinding (Optional)

- Designed for automatic unloading for round tubes and bar stock. This equipment avoids workpiece surface scratching. It is also suitable for online operation while performing two to three grinding processes. The conveyor is easy to adjust. Equipped with a parts tray for convenient parts collection after grinding.



Auto Loading and Unloading Equipment for Infeed Grinding (Optional)

- It employs a robot arm to pick workpieces from the tray and place them into the machine for grinding. The other robot arm picks the finished workpieces and places them on the collection tray. This equipment provides a fully automatic grinding operation that saves labor while enormously upgrading production efficiency.



Automatic Loading Equipment for Thrufeed Grinding (Optional)

- Suitable for automatic loading operations for round tubes and bar stock.
- Equipped with a storage tray for automatic workpiece infeed.
- It eliminates manual workpiece infeed while enormously increasing total efficiency.

Carbide Blade for Both Thrufeed and Infeed Grinding (Selection Table)

Workpiece	Carbide Blade Thickness	Workpiece	Carbide Blade Thickness FCL-12	Carbide Blade Thickness FCL-18
1.5 - 2.5m/m	t=1 m/m	8.1 - 10 m/m	t=6 m/m for Ø10	t=6 m/m for Ø10
2.6 - 4.0m/m	t=2 m/m	10.1 - 16 m/m	t=8 m/m for Ø16	t=8 m/m for Ø16
4.1 - 5.0m/m	t=3 m/m	12 - 20 m/m	t=8 m/m for Ø20	t=10 m/m for Ø20
5.1 - 7m/m	t=4 m/m	15 - 30 m/m	t=13 m/m for Ø30	t=13 m/m for Ø30
7.1 - 8m/m	t=5 m/m	25 - 50 m/m	t=20 m/m for Ø40	t=20 m/m for Ø50



Standard Accessories:



1. Regulating wheel and flange x 1 set (mounted on machine)



2. Grinding wheel and flange x 1 set (mounted on machine)



3. CNC Control x 1 set



4. Infeed work rest x 1 set and carbide blade x 1 pcs



5. Thrufeed work rest x 1 set and carbide blade x 1 pcs



6. Standard coolant system x 1 set



7. Diamond tools x 2 pcs (mounted on machine)



8. Work lamp x 1 set (mounted on machine)



9. Tool box and kits x 1 set

Optional Accessories:



1. Wheel balancing stand and arbor



2. Manual feeder for infeed grinding (up and down)



3. Hydraulic work ejector (infeed grinding)




4. Automatic loading attachment (thrufeed grinding) (Ø > 20 mm, L100-600 mm)



5. Automatic feeder for thrufeed grinding (hopper type) (Ø 2-8 mm, L50-180 mm)



6. Automatic unloading attachment (thrufeed grinding)

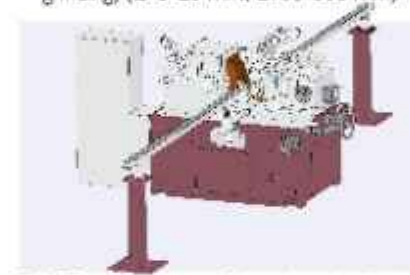

7. V Type Supporter for long bar grinding (Ø2-14 mm)



8. Magnetic coolant separator



9. Magnetic with paper filter



10. Hydrocyclone coolant separator



11. Auto. loading and unloading attachment (infeed grinding)




12. Vibratory feeder (thrufeed grinding)



13. Large work rest (thrufeed grinding) L: 250 - 500mm



Dimensions and Floor Occupation

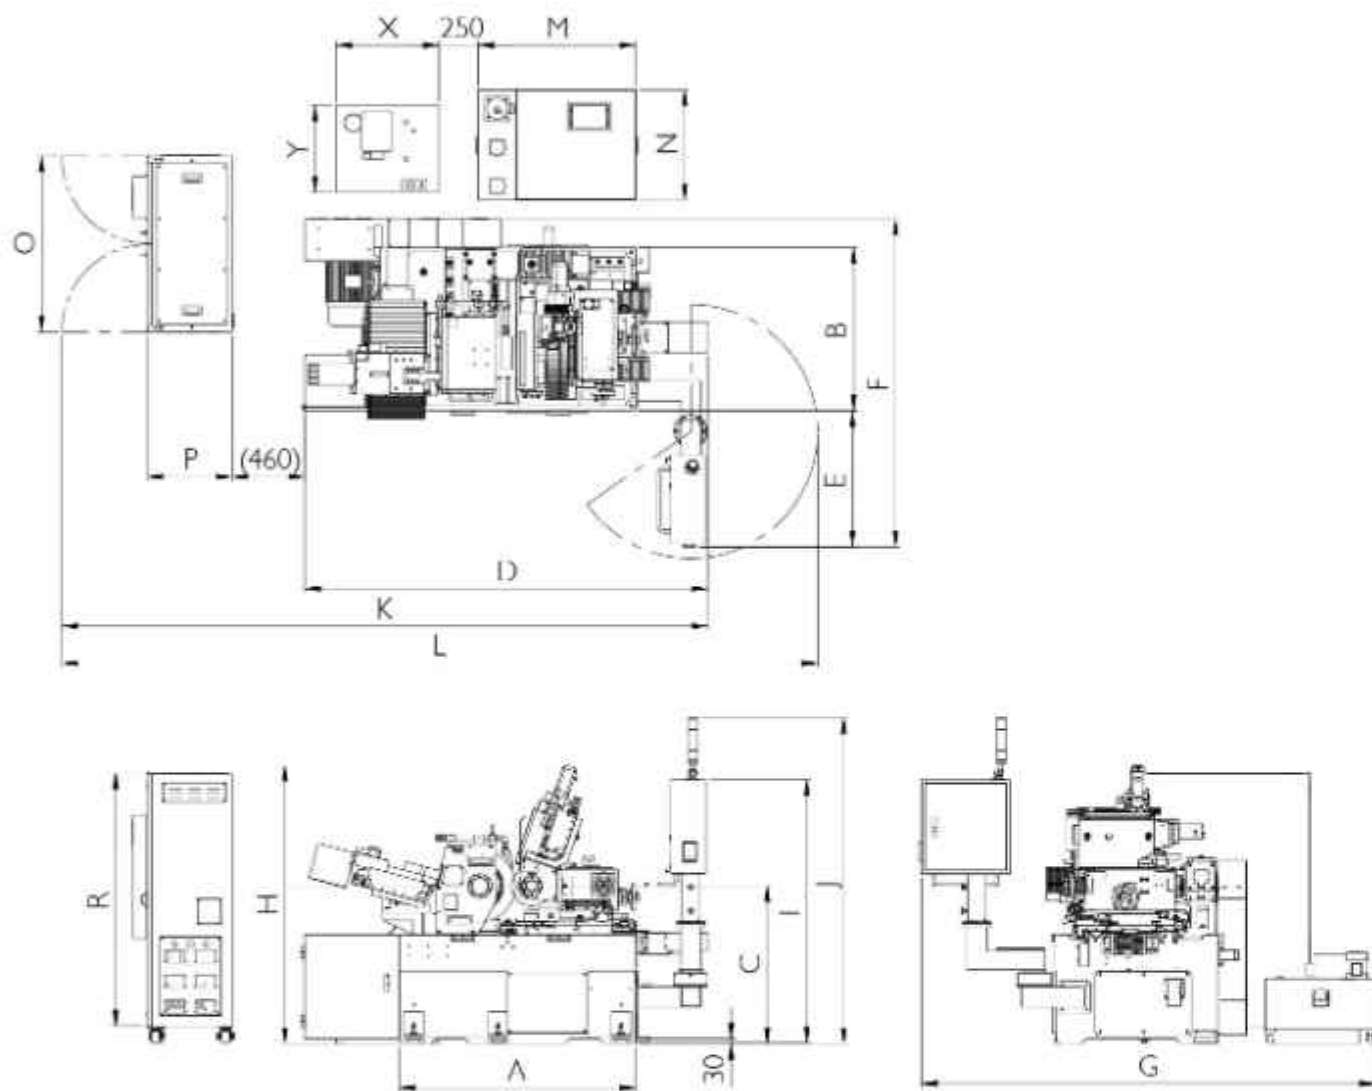

Unit: mm

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	R	X	Y	
FCL-12	1085	655	934	1935	435	1245	1890	1400	1715	2110	3395	3585	735	490	1115	540	1620	530	450	
FCL-18	1500	1035	1000	2560	865	2080	2900	1765	1675	2070	4095	4795	1000	700	1115	540	1620	690	550	
FCL-1810																				
FCL-1812	1555	1070	990	2580	885	2140	2900	1765	1675	2070	4120	4670	1000	700	1115	540	1620	690	550	
FCL-1814																				
FCL-20	1600	1035	1037	2660	865	2080	2900	1765	1675	2070	4195	4895	1000	700	1115	540	1620	690	550	
FCL-24																				
FCL-2410	1700	1035	1052	2760	865	2080	2900	1765	1675	2070	4295	4995	1000	700	1115	540	1620	690	550	
FCL-2412																				

Example of Grinding Workpieces



SPECIFICATIONS	FCL-12	FCL-18	FCL-1810	FCL-1812	FCL-20	FCL-24	FCL-2410	FCL-2412
Grinding Wheel								
Standard grinding range (Dia.)	Ø1-Ø40mm	Ø1-Ø60mm	Ø1-Ø60mm	Ø1-Ø60mm	Ø1-Ø60mm	Ø1-Ø100mm	Ø1-Ø100mm	Ø1-Ø100mm
Capacity increases with special arrangement	Ø30-Ø60mm	Ø10-Ø150mm	Ø10-Ø150mm	Ø10-Ø150mm	Ø10-Ø150mm	-	-	-
Grinding wheel size (O.D. x width x I.D.)	Ø305 x 150 x Ø120	Ø455 x 205 x Ø228.6	Ø455 x 255 x Ø228.6	Ø455 x 305 x Ø228.6	Ø510 x 205 x Ø304.8	Ø610 x 205 x Ø304.8	Ø610 x 255 x Ø304.8	Ø610 x 305 x Ø305.6
Linear velocity	33 m/s	33 m/s	33 m/s	33 m/s	33 m/s	33 m/s	33 m/s	33 m/s
Grinding wheel motor	7 (2 HP) x 4P	15 (1 HP) x 4P	15 (1 HP) x 4P	20 (1 HP) x 4P	20 (1 HP) x 4P	25 (1 HP) x 4P	25 (1 HP) x 4P	25 (1 HP) x 4P
Regulating Wheel								
Regulating wheel size (O.D. x width x I.D.)	Ø205 x 150 x Ø90	Ø255 x 205 x Ø111.2	Ø255 x 255 x Ø111.2	Ø255 x 305 x Ø111.2	Ø305 x 205 x Ø127	Ø330 x 205 x Ø127	Ø330 x 255 x Ø127	Ø330 x 305 x Ø127
Regulating wheel speed	10-300 R.P.M. (Variable)	10-300 R.P.M. (Variable)	10-300 R.P.M. (Variable)	10-300 R.P.M. (Variable)	10-300 R.P.M. (Variable)	10-200 R.P.M. (Variable)	10-200 R.P.M. (Variable)	10-200 R.P.M. (Variable)
Regulating wheel motor	1.3 kW servo motor	3.5 kW servo motor	3.5 kW servo motor	3.5 kW servo motor	3.5 kW servo motor	5.0 kW servo motor	5.0 kW servo motor	5.0 kW servo motor
Regulating wheel tilt angle	+5°-3°	+5°-3°	+5°-3°	+5°-3°	+5°-3°	+5°-3°	+5°-3°	+5°-3°
Regulating wheel swivel angle	±5°	±5°	±5°	±5°	±5°	±5°	±5°	±5°
Drive Motors								
Hydraulic pump motor	1 HP x 4P	1 HP x 4P	1 HP x 4P	1 HP x 4P	1 HP x 4P	1 HP x 4P	1 HP x 4P	1 HP x 4P
Coolant pump motor	1/8 HP x 2P	1/8 HP x 2P	1/8 HP x 2P	1/8 HP x 2P	1/8 HP x 2P	1/8 HP x 2P	1/8 HP x 2P	1/8 HP x 2P
Net weight	1700 kgs	2600 kgs	3000 kgs	3400 kgs	3700 kgs	4500 kgs	4600 kgs	5000 kgs
Gross weight	2000 kgs	3200 kgs	3300 kgs	3700 kgs	4000 kgs	4800 kgs	4900 kgs	5300 kgs

• The mentioned specifications & dimensions are subject to change without notice.