




Installed Dimensions

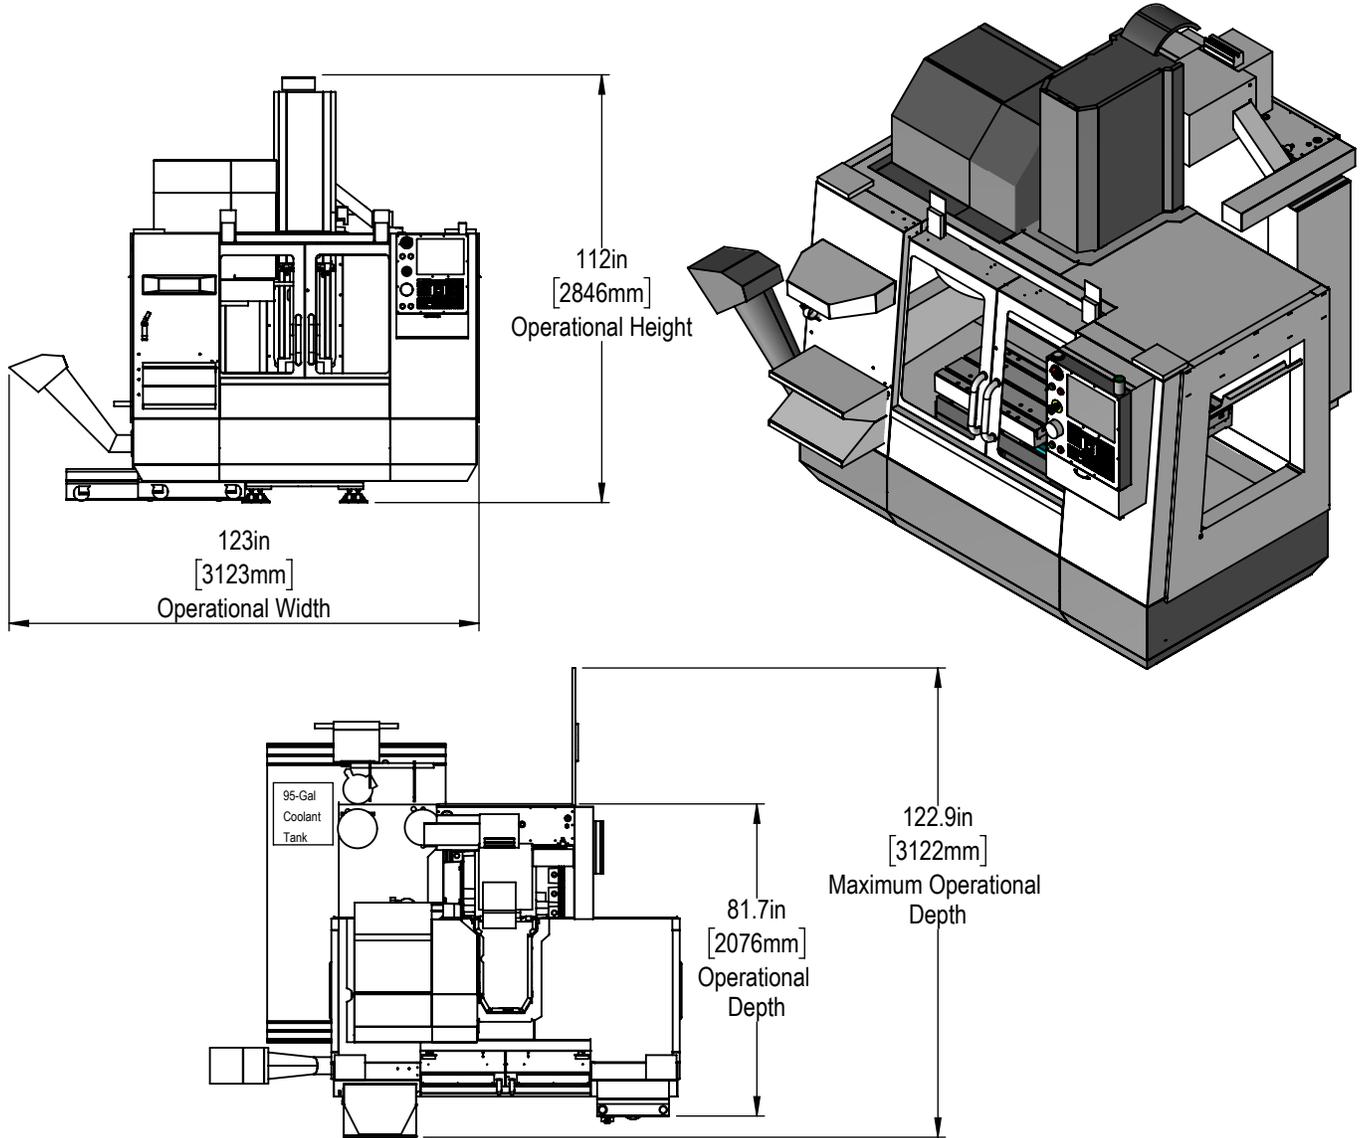

Leveling Pad Height

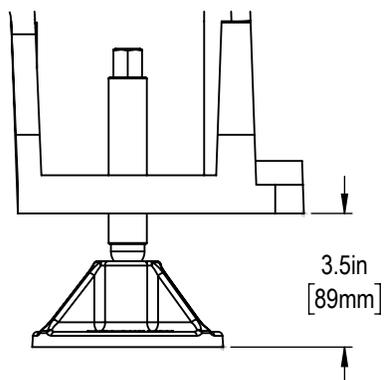


Shipping Dimensions

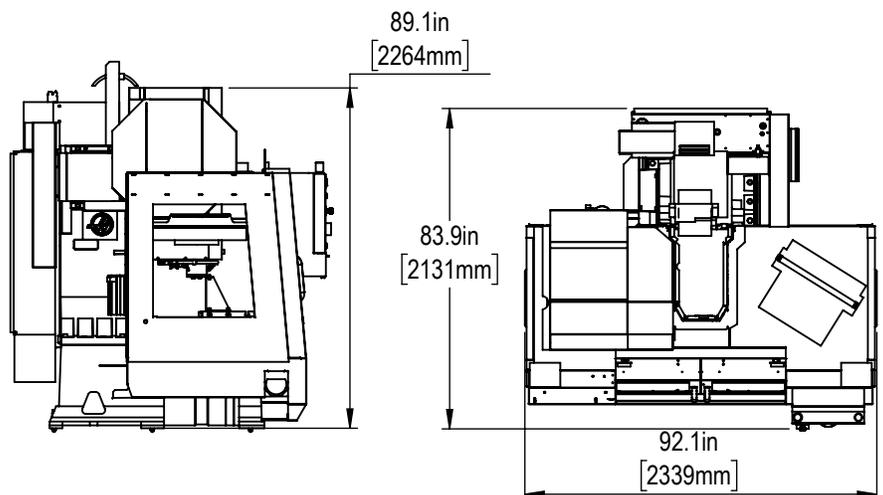


\*All Height Dimensions Based on Suggested Leveling Pad Height

**Air & Power**

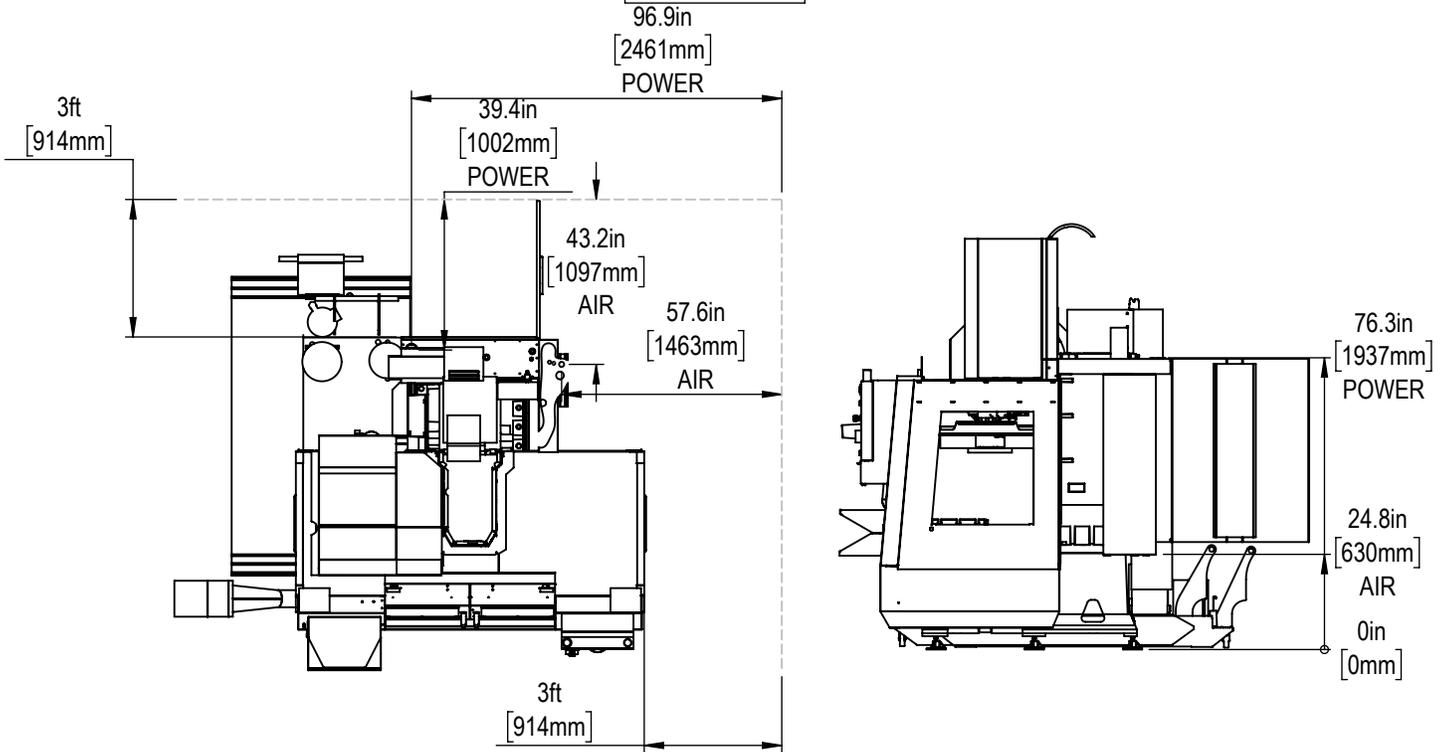


**Anchor Pattern**

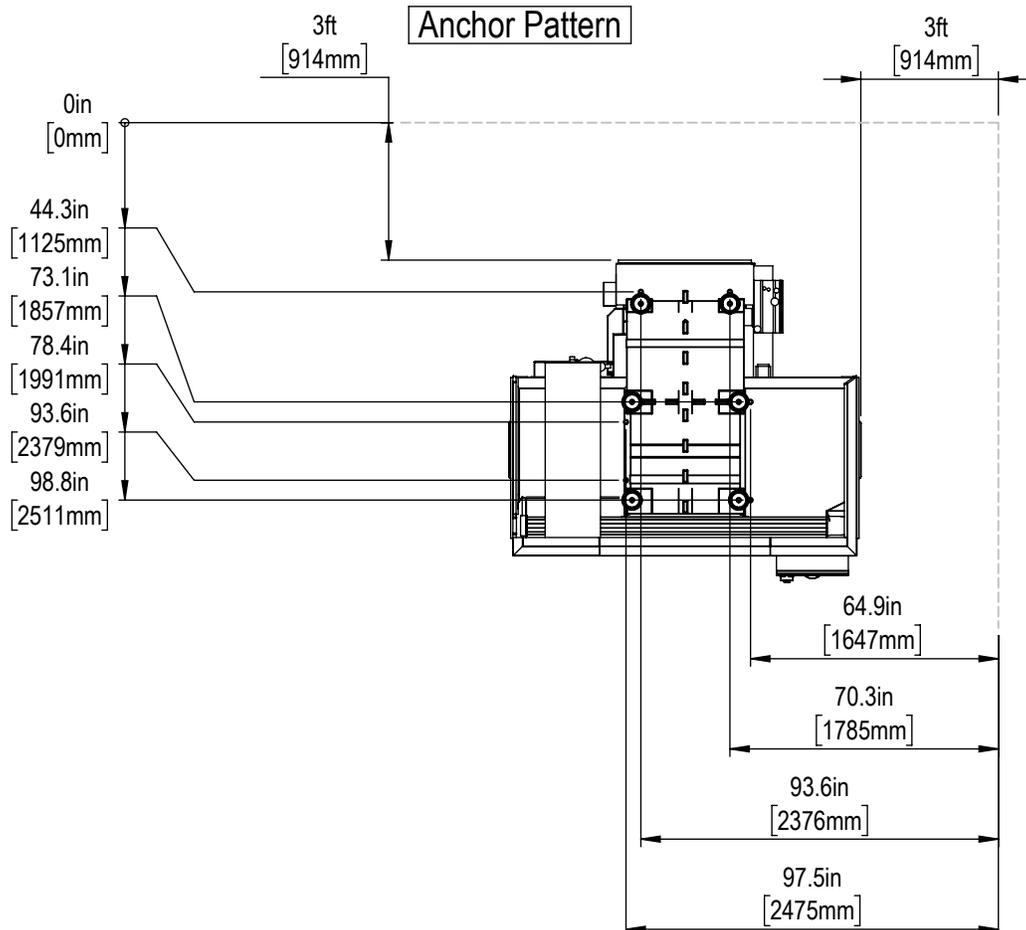




Height Breakdown

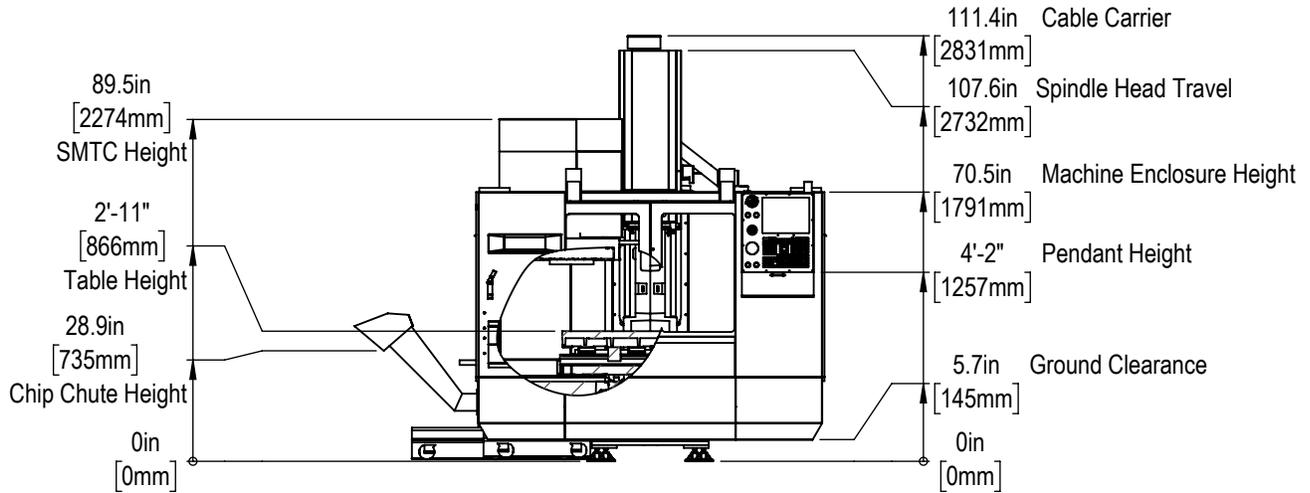


Width Breakdown

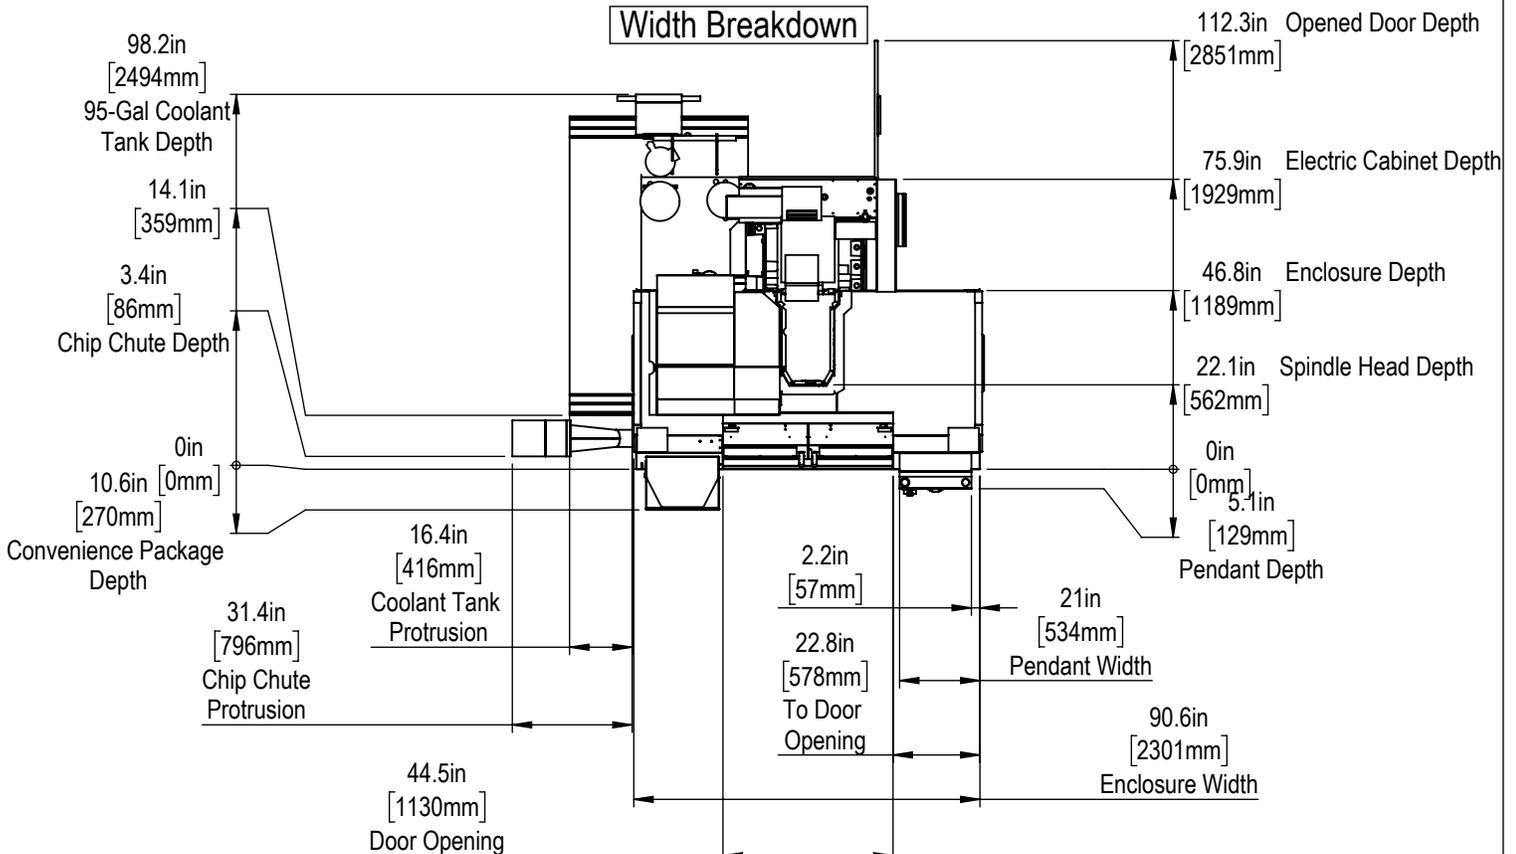


Maintain 3 feet [915mm] clearance to the nearest obstruction around all sides of machine perimeter for maintenance access

X&Y-Axis Travel

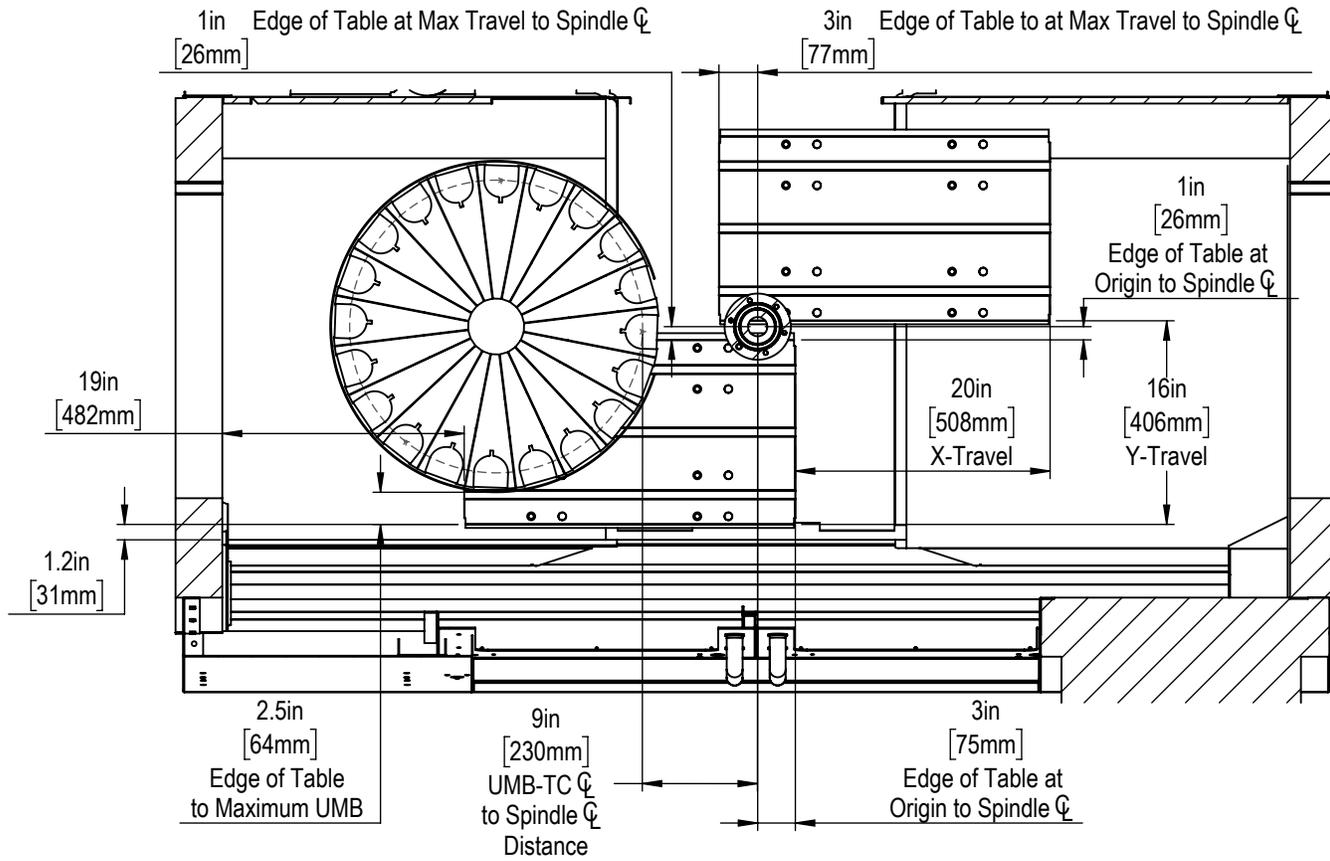


Z-Axis Travel

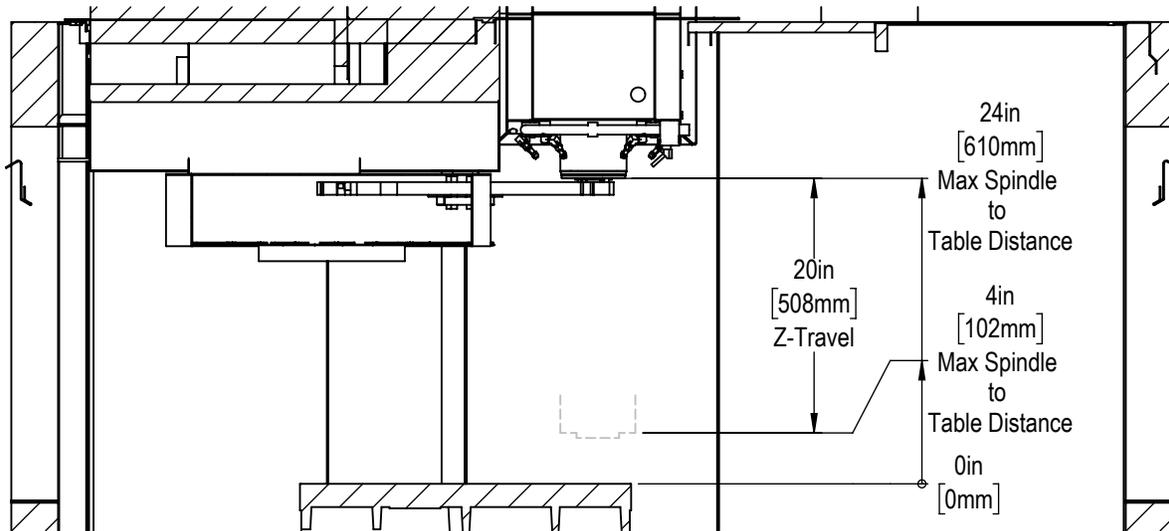




**Table**

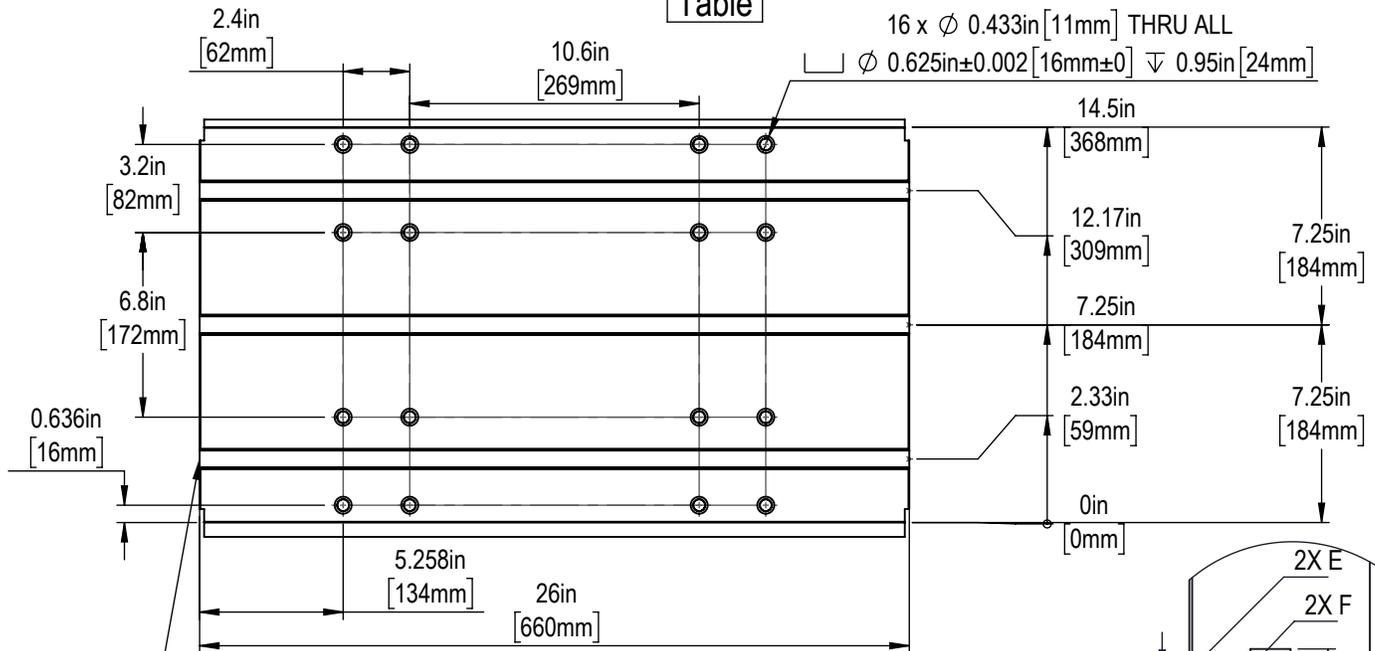


**16mm T-Slots**

Slot Size	A	B	C	D	E	F
12mm	$0.438^{+0.002}_{-0.000}$	$0.76 \pm 0.02$	$0.310 \pm 0.010$	$0.318 \pm 0.010$	$0.03 \times 45^\circ$	$0.020 \times 45^\circ$
16mm	$0.628 \pm 0.002$	$1.06 \pm 0.02$	$0.640 \pm 0.010$	$0.420 \pm 0.010$	$0.06 \times 45^\circ$	$0.020 \times 45^\circ$




T-Slot Dimensions in inches

**Tool Changer**

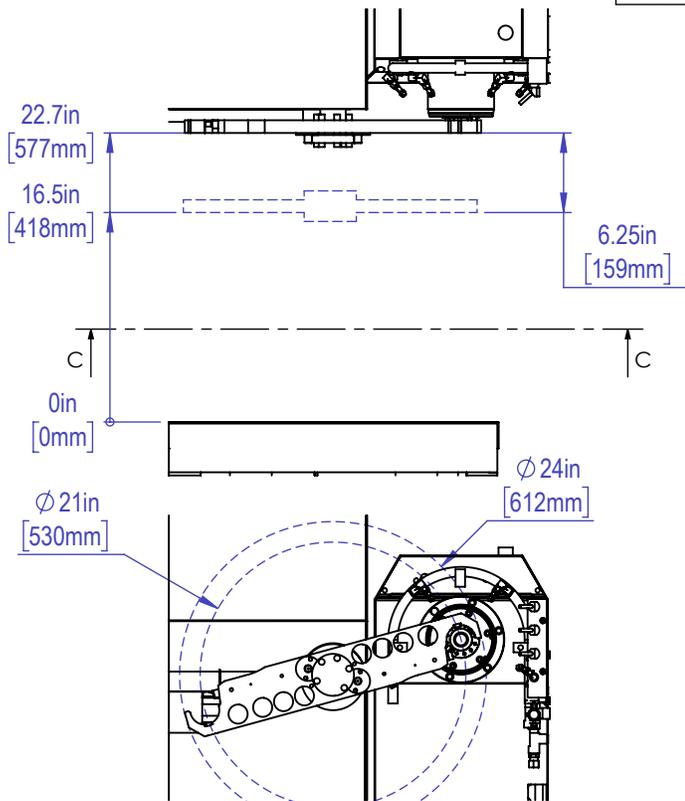

SECTION C-C  
SCALE 1 : 15

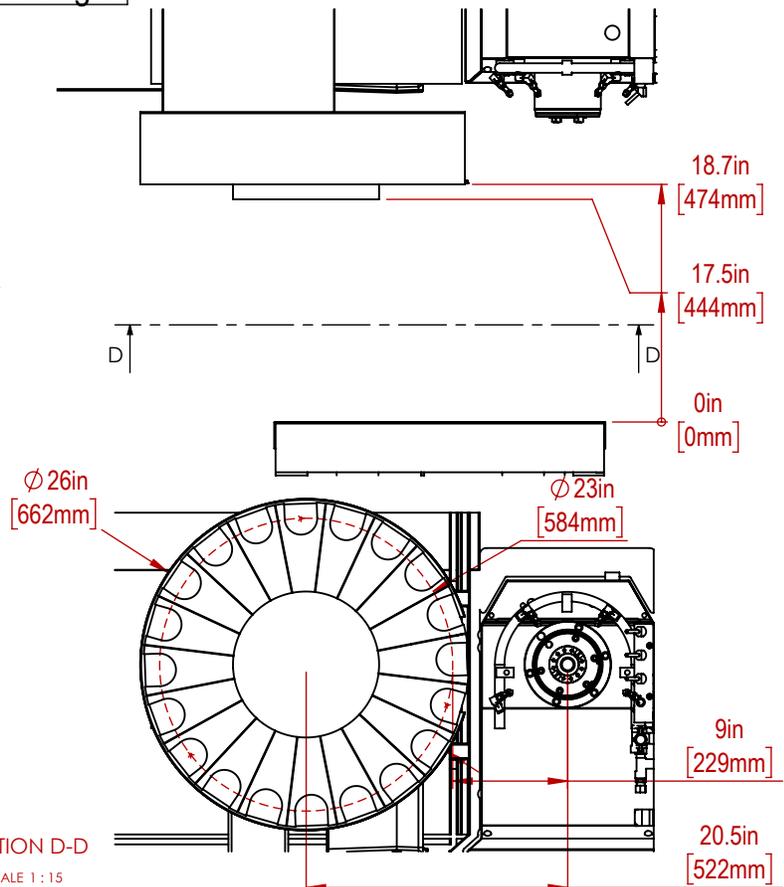

SECTION D-D  
SCALE 1 : 15